

# Cargo Equipment Solutions, Inc.

12301 SW 128 Court, Unit 104, Miami, Florida 33186  
 Phone: 305-259.4537 / 305-259.4538 / Fax: 305-259.4539 / U.S. Toll Free: 877-813.0251  
 Email: sales@cargo equipmentsolutions.com

## **Diesel Generating Set C825**

MODEL	C825
Standby Power (60Hz)	800KW / 1000KVA
Prime Power (60Hz)	725KW / 906KVA

### Standard Features

#### General Features:

- Engine (CCEC Cummins KTA38-G2)
- Radiator 40C max, fans are driven by belt, with safety guard
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Absorber
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Permanent Magnet Generator (PMG)
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, muffler.
- User manual



PHOTO FOR REFERENCE ONLY

### Generator Ratings

Voltage	HZ	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
480/277	60	3	0.8	1202	800/1000	725/906
460/266	60	3	0.8	1255	800/1000	725/906
440/254	60	3	0.8	1312	800/1000	725/906
416/240	60	3	0.8	1388	800/1000	725/906

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

### Sales Promises

Cargo Equipment Solutions, Inc provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty on equipments are: One (01) year or 1000 Hours of standard working condition, what ever comes first. Service and parts are available from Cargo Equipment Solutions, Inc.

**Specifications may change without notice.**

# Cargo Equipment Solutions, Inc.

12301 SW 128 Court, Unit 104, Miami, Florida 33186  
Phone: 305-259.4537 / 305-259.4538 / Fax: 305-259.4539 / U.S. Toll Free: 877-813.0251  
Email: sales@cargoequipmentsolutions.com

## ***Diesel Generating Set C825***

### ENGINE DATA

Manufacturer / Model:	CCEC Cummins KTA38-G2
Air Intake System:	Turbo, Water /Air Cooling
Fuel System:	PT type fuel pump
Cylinder Arrangement:	12 in V
Displacement:	37.8L
Bore and Stroke:	159*159 (mm)
Compression Ratio:	14.5 : 1
Rated RPM:	1800rpm
Max. Standby Power at Rated RPM:	895KW / 1217Hp
Governor Type:	Electronic

### Exhaust System

Exhaust Gas Flow:	3679L/s
Exhaust Temperature:	502°C
Max Back Pressure:	10kPa

### Air Intake System

Max Intake Restriction:	6.23kPa
Burning Capacity:	1369L/s
Air Flow:	36146 L/s

### Fuel System

100%( Prime Power) Load:	182.53 Lts / Hr
75%( Prime Power) Load:	186.79 Lts / Hr
50%( Prime Power) Load:	198.74 Lts / Hr

### Oil System

Total Oil Capacity:	135.0L
Oil Consumption:	≤4g/Kwh
Engine Oil Tank Capacity:	114.0L
Oil Pressure at Rated RPM:	310 - 448kPa

### Cooling System

Total Coolant Capacity:	252L
Thermostat:	82-93°C
Max Water Temperature:	104°C

**Specifications may change without notice.**

# Cargo Equipment Solutions, Inc.

12301 SW 128 Court, Unit 104, Miami, Florida 33186  
Phone: 305-259.4537 / 305-259.4538 / Fax: 305-259.4539 / U.S. Toll Free: 877-813.0251  
Email: sales@cargoequipmentsolutions.com

## ***Diesel Generating Set C825***

### **ALTERNATOR SPECIFICATION**

#### **General Data**

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

#### **Alternator Data**

Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, jYj type connecting
Number of Bearing:	1
Power Factor:	0.8
Protection Grade:	IP23
Altitude:	≤1000m
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
Telephone Influence Factor (TIF):	< 50
THF:	< 2%
Voltage Regulation, Steady State:	≤±1%
Alternator Capacity:	925KVA
Alternator Efficiencies:	94.50%
Air Cooling Flow:	1.961m <sup>3</sup> /s

### **GENERATING SET DATA**

Voltage Regulation:	≥±5%
Voltage Regulation, Stead State:	≤±1%
Sudden Voltage Warp (100% Sudden Reduce):	≤+25%
Sudden Voltage Warp (Sudden Increase):	≤-20%
Voltage Stable Time (100% Sudden Reduce):	≤6S
Voltage Stable Time (Sudden Increase):	≤6S
Frequency Regulation, Stead State:	≤5%
Frequency Waving:	≤0.5%
Sudden Frequency Warp (100% Sudden Reduce):	≤+12%
Sudden Frequency Warp (Sudden Increase):	≤-10%
Frequency Recovery Time (100% Sudden Reduce):	≤5S
Frequency Recovery Time (Sudden Increase):	≤5S

**Specifications may change without notice.**

# Cargo Equipment Solutions, Inc.


12301 SW 128 Court, Unit 104, Miami, Florida 33186  
 Phone: 305-259.4537 / 305-259.4538 / Fax: 305-259.4539 / U.S. Toll Free: 877-813.0251  
 Email: sales@cargo equipmentsolutions.com

## Diesel Generating Set C825

### Options

Engine	Fuel System	Control System
<ul style="list-style-type: none"> <li><input type="checkbox"/> Heater 2KW &amp; 4KW</li> <li><input type="checkbox"/> Battery Charger 3.5A &amp; 7A</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Daily Fuel Tank</li> <li><input type="checkbox"/> Base Fuel Tank</li> <li><input type="checkbox"/> Water Separator</li> <li><input type="checkbox"/> Fuel Level Sensor</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Auto Control Panel</li> <li><input type="checkbox"/> Remote Control Panel</li> <li><input type="checkbox"/> Auto Transfer Switch (ATS)</li> <li><input type="checkbox"/> Paralleling System</li> </ul>
Alternator	Others	Data
<ul style="list-style-type: none"> <li><input type="checkbox"/> Anti Condensation Heater</li> <li><input type="checkbox"/> Drop CT (For Paralleling)</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Rainproof Type</li> <li><input type="checkbox"/> Soundproof Type</li> <li><input type="checkbox"/> Container Type</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Engine Parts Drawing List</li> <li><input type="checkbox"/> Spare Parts</li> </ul>

### Dimensions & Weight

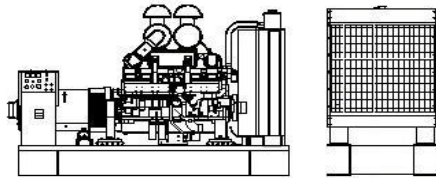

#### Standard Configuration (Open Type)


Overall Size: 4500 (mm) \*2100 (mm) \*2280 (mm)  
 Weight: 6850kg

#### With Base Fuel Tank

Overall Size: 4500 (mm) \*2100 (mm) \*2320 (mm)  
 Weight: 6900kg

#### Soundproof Type (20' FT. Container)

Overall Size: 5898 (mm) \*2352 (mm) \*2385 (mm)  
 Weight: 11500kg

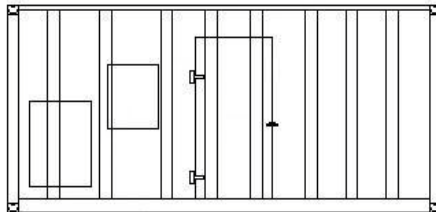

Specifications may change without notice.

# Cargo Equipment Solutions, Inc.

12301 SW 128 Court, Unit 104, Miami, Florida 33186  
Phone: 305-259.4537 / 305-259.4538 / Fax: 305-259.4539 / U.S. Toll Free: 877-813.0251  
Email: sales@cargo equipmentsolutions.com

## ***Diesel Generating Set C825***

### Standard Control Panel



Cargo Equipment Solutions, Inc. Standard Control Panel is the basic configuration for normal operation and usage, it is of some advantages such as easy to operate, various function and well protection. Operative buttons such as Turn On, Per-heat, Starting, Stop (Emergency Stop) on the panel. While malfunction occurs, control panel will stop the generator and also alarm with light or buzz.

### Auto Module Control Panel



Auto Module Control Panel is the configuration for nobody on duty controlling generators. This kind of panel adopts auto module control system, with large LCD display to show the menu.

Features: MRS10-can receive remote output signal from ATS and realize auto start and stop of generators.

MRS16-can realize all functions of MRS10, add RS232 interface which can communicate with PC to realize remote operation.

AMF25-Auto Mains Failure controller, can realize all functions of MRS16, furthermore can detect ATS and control directly.

### Auto Parallel Control Panel



Automatic Parallel Control Panel, This new automatic parallel system adopts intelligent modules, inserted and folded installed, no need the peripheral relay and logic circuit. The main switch adopts electronic breaker or frame breaker, combined together with the generator, which is very reliable. One generator, one panel. The panel can be used both for singly and parallel. It is only need to parallel generator with such panel when the capability needs to be enlarged in the future.

**Specifications may change without notice.**